




## DIAMOND CUP WHEELS

### TURBO CUP WHEELS WITH ALUMINUM BASE

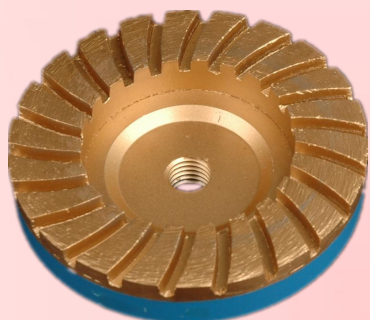

DIAMETER	NO OF SEG	GRIT	THREAD
Φ100/60	22	50#	M14




DIAMETER	NO OF SEG	GRIT	THREAD
Φ100/60	24	50#	M14

### TURBO CUP WHEELS WITH IRON BASE



DIAMETER	NO OF SEG	GRIT	THREAD
Φ100/60	24	50#	M14
Φ125/80	28		M16
			5/8"-11

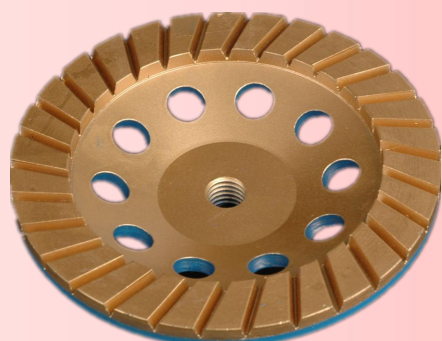

DIAMETER	NO OF SEG	GRIT	THREAD
Φ100/60	22	50#	5/8"-11
Φ150/110	30		




## CUP WHEELS WITH SINGLE-ROW SEGMENT



DIAMETER	NO OF SEG	GRIT	THREAD
Φ100	8	60#	Φ15
		80#	Φ20
			5/8"-11

## CUP WHEELS WITH DOUBLE-ROW SEGMENT

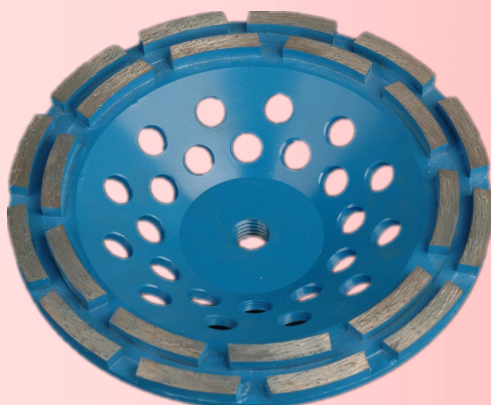

DIAMETER	NO OF SEG	GRIT	THREAD
Φ100	8+8	30#	Φ15 Φ20 5/8"-11
Φ125	10+10	30#	
	10+10	50#	
	10+10	100#	
Φ150	10+10	30#	
	10+10	50#	
	10+10	100#	
Φ175	12+10	30#	

## CUP WHEELS WITH RADIAL SEGMENTS



DIAMETER	NO OF SEG	SIZE OF SEG	INNER HOLE
Φ100	6+3	30x7x5	Φ15 Φ20
	6	30x8.5x5.5	
	3	23x8.3x5.5	
Φ125	6+3	38x8x5	
Φ150	6+3	45x8x5	
Φ175	6+3	52x8x5	